


# Dimensions and Specifications

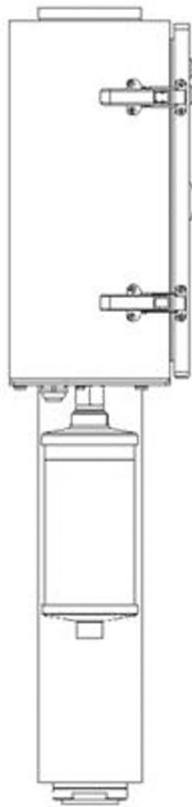

Material	Mild steel with passivation and epoxy powder coating finish
Connection	Flange, pipe thread or remote connection
Mounting modes	On line or direct floor mounting
IP Rating	IP63
Operating temperature	-20 °C to +60 °C
Humidity	95% RH non condensing
Desiccant type	Non indicating silica gel
Desiccant contents	RT1 1 kilograms RT2 2 kilograms

Desiccant capacity	150 grams at 30% RH 15% by weight
Reactivation control temperature	90 °C ± 10 °C
Saturation indicator	RH display
Maximum pressure	1 psi
Maximum flow rate	20 litres/min (Peak)
Reactivation time	Nominal 6 hours
Power consumption	230 volts 5 amps or 100 volts 10 amps
Weight	17 kilograms